


CIRCUTOR,S.A.

# Platform

# PowerStudio 4.0.11

**Changes 4.0.11 vs 4.0.10**

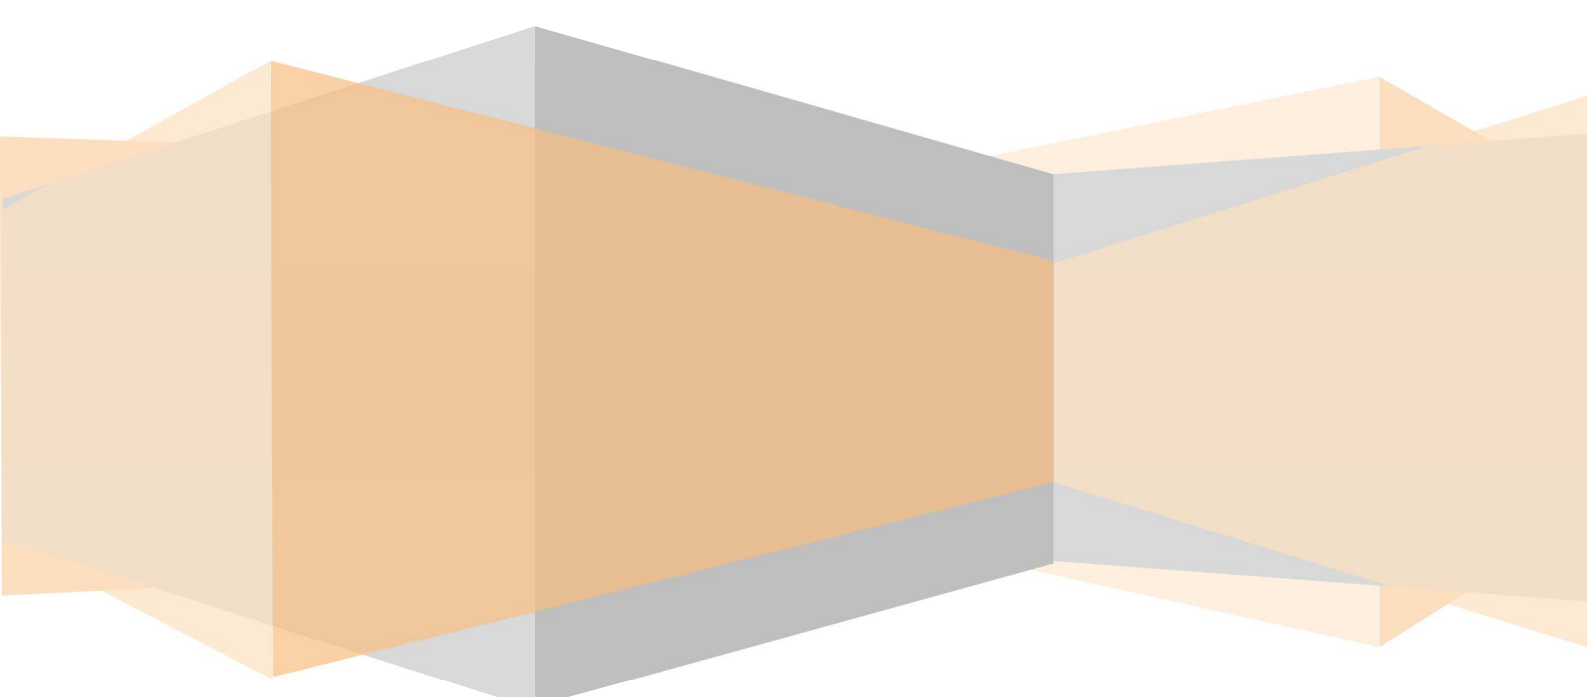

## **Changes 4.0.10 vs 4.0.9**

1. CORRECTION BUGS AND GENERAL IMPROVEMENTS.....	3
2. Equipment.....	3
3. New DRIVERS.....	4
4. Others .....	4

## 1. CORRECTION BUGS AND GENERAL IMPROVEMENTS

### ENGINE

- Fixed BUG, when forcing text variables in lower engines
- Update and correction texts in the translation of several languages

### EDITOR

- Waveforms of supply quality equipment (CVM-A1500) enabled on SCADA screens
- Improved configuration of outgoing SMTP mail. The username is allowed to be different from the configured email address.

## 2. Equipment

- **CVM-A1500** - Correction in the product description
- **CVM-A1500** - Correction when there is a configuration change of parameters made through the keyboard and the screen. They did not apply to the WEB environment or the superior PowerStudio
- **CVM-A1500** - correction in the display of harmonics 46, 47 and 48. They were exchanged
- **CVM-A1500** - correction of the overflow of incremental variables that generate anomalous values due to overflow
- **CVM-A1500** - Adapted decimals in frequency (3) i in numerical display of harmonics (2). According to requirements of IEC-61000-4-30
- **CVM-B and CVM-A**. Power limits up to 900MW are allowed
- **CBS8** - Settings of the protection time delay were not loaded correctly
- **EDS** - Fixed BUG that causes incoherent values in calculated variables, related to pulse channels after periods without detection
- **CIRWATT B102** - Enabled in the device list
- **CEM-C6** - Optimized code for speed forcing and Modbus peripheral number
- **CEM-C6** - Modbus map change compatibility with the two existing versions, for 2 and 4 quadrants

## Platform PowerStudio 4.0.11

---

- **RECMAX-CVM** - Modbus map change, compatibility with the two existing versions
- **COMPUTER SMART III** - Connection to the 2U1C network enabled
- **LM-4A** - Corrected calculation of signal conversion from 0 / 4..20mA, the calculation was not correct
- **Generic Modbus** - Allows grouping memory map addresses to allow readings / writings greater than 4 records

### **3. New DRIVERS**

- **Raption 22, Raption 50 and URBAN** - Added recharge drivers
- **LR1RS +** - LORA gateway driver

### **4. Others**

#### **5. HTML5**

- Report printing functionality enabled