Dar de alta la Batería de condensadores en el VAR de Scout


Nota de Aplicación

ES


1. Realizar la instalación de la **Batería de condesandores** y su puesta en marcha, siguiendo el manual de instrucciones del equipo.
   Nota: *Si se ha adquirido el **Smart Link VAR (SLVAR)** por separado a la batería de condensadores, instalarlo con la batería desconectada, y conectarlos de acuerdo a lo indicado en el manual del **SLVAR.***
   Nota: *El **Computer SMART III** debe encenderse antes o de manera simultánea al **SLVAR**.*
   Nota: *Si la batería de condensadores es de **Circutor** y ya lleva instalado el **SLVAR**, simplemente realizar la instalación de la batería de condensadores de la manera habitual, siguiendo el manual de instrucciones de la batería.*

2. Una vez la batería esté en marcha, descargar la App **Circutor MyConfig** desde Google Play Store o App Store.


3. Abrir la App **Circutor MyConfig** y seleccionar el **Computer SMART III**.

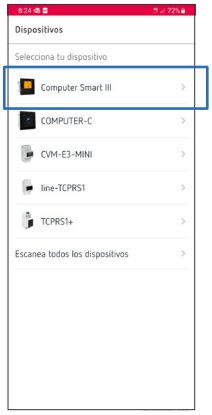

4. Enlazar el equipo.
   El código **PIN** corresponden a los 8 últimos números de serie (S/N) situado en el frontal del **SLVAR**.
   Nota: *Si la batería es de **CIRCUTOR** y ya incorpora el **SLVAR** de serie, la etiqueta con dicha información se encuentra al lado del **Computer SMART III.***

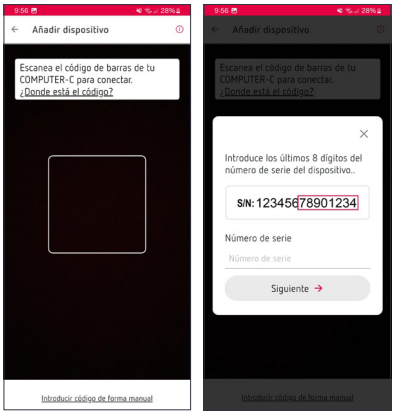

5. Seleccionar **editar** ✎ para activar la Wi-Fi del equipo: introducir el nombre de la red Wi-Fi (SSID), su contraseña y asignar una IP, ya sea por DHCP o manualmente.

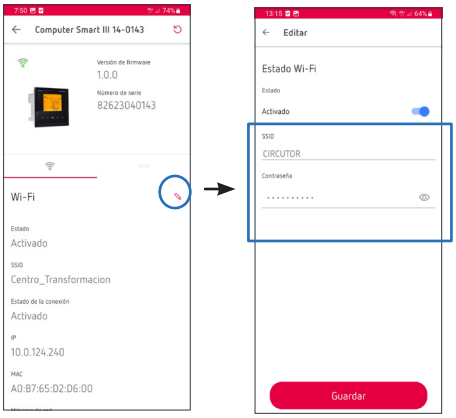

6. Si la conexión Wi-Fi es correcta el LED **WLAN** del **SLVAR** se enciende. También es posible activar Ethernet, si se ha conectado el puerto Ethernet al **SLVAR**. En este caso, si la conexión es correcta se enciende el LED **LAN** del **SLVAR**.

7. Finalmente, entrar y registrase en **www.scout.circutor.com**. Dar de alta el equipo mediante el ID que aparece en el **SLVAR**.
   Nota: *Si la batería es de **CIRCUTOR** y ya incorpora el **SLVAR** de serie, la etiqueta con dicha información se encuentra al lado del **Computer SMART III.***
   La batería ya está conectada al VAR.

22
PAP

CIRCUTOR SAT: 902 449 459 (SPAIN) / (+34) 937 452 919 (out of Spain)
Vial Sant Jordi, s/n
08232 - Viladecavalls (Barcelona)
Tel: (+34) 937 452 900 - Fax: (+34) 937 452 914
e-mail : sat@circutor.com

M389E0101-20-24A

Registering a capacitor bank in the Scout VAR

Application note


EN

1. Install the **capacitor bank** and put it in service as per the device's instruction manual.
   Note: *If the* ***Smart Link VAR (SLVAR)*** *was purchased separately from the capacitor bank, install it with the bank disconnected and connect it as instructed in the* ***SLVAR*** *manual.*
   Note: *The* ***Computer SMART III*** *must be turned on before or at the same time as the* ***SLVAR****.*
   Note: *If the capacitor bank is from* ***Circutor*** *and already features the* ***SLVAR****, simply install the capacitor bank as usual, as per the instructions for the bank.*


2. Once the bank is in service, download the **Circutor MyConfig** App from the Google Play Store or App Store.




3. Open the **Circutor MyConfig** App and select the **Computer SMART III**.

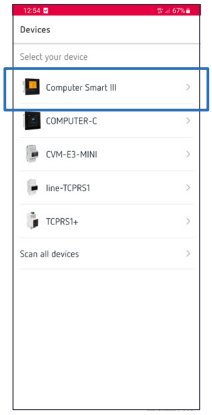

4. Pair the device.
   The **PIN** corresponds to the last 8 digits of the serial number (S/N) located on the front of the **SLVAR**.
   Note: *If the bank is from* ***CIRCUTOR*** *and already comes with the* ***SLVAR****, the label with this information will be next to the* ***Computer SMART III.***

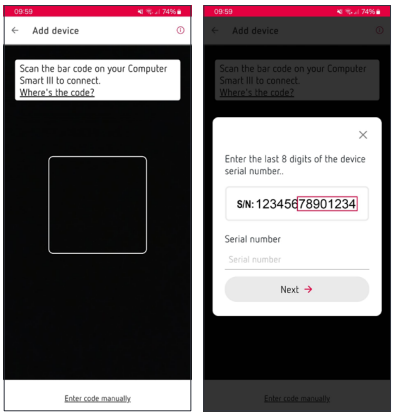

5. Select **edit** ✎ to activate Wi-Fi on the device: enter the name of the Wi-Fi network (SSID) and its password and assign an IP, either via DHCP or manually.

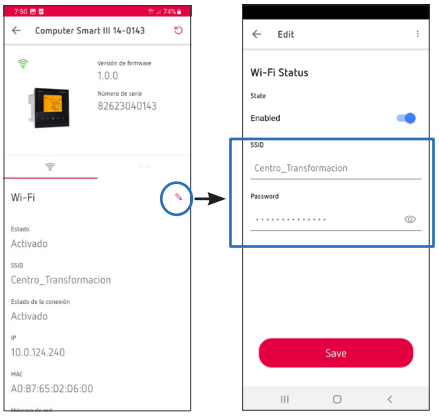

6. If the Wi-Fi connects correctly, the **WLAN** LED on the **SLVAR** turns on. Ethernet can also be enabled if a cable is connected to the Ethernet port on the **SLVAR**. In this case, if the connection is correct, the **LAN** LED on the **SLVAR** turns on.

7. Finally, register at **www.scout.circutor.com**. Register the device using the ID that appears in the **SLVAR**.
   Note: *If the capacitor bank is from* ***CIRCUTOR*** *and already comes with the* ***SLVAR****, the label with this information will be next to the* ***Computer SMART III****.*
   The capacitor bank is now connected to the VAR.

22
PAP

CIRCUTOR SAT: 902 449 459 (SPAIN) / (+34) 937 452 919 (out of Spain)
Vial Sant Jordi, s/n
08232 - Viladecavalls (Barcelona)
Tel: (+34) 937 452 900 - Fax: (+34) 937 452 914
e-mail : sat@circutor.com

M389E0101-20-24A